


1 Jones Way, P.O.Box 808, West Middlesex, PA 16159

(724) 528-3569 * Toll Free (800)-451-1600

jphoods@jonesperformance.com * www.trukrodz.com

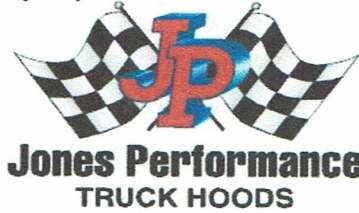

READ BEFORE INSTALLATION

Thank you for purchasing a Jones Performance hood. Please read the following information before installing your hood.

Hood MUST be fit before painting.

Standard Headlight Fit

If you should have any issues with the fit of the headlights in your JP hood, please check the following:

- Be sure you have used the two adjustment screws located on the bottom of the headlights. Most times a little adjusting of these two screws will correct any fit issues.
- If the rubber gasket does not come in contact with the hood, be sure the seal is in the correct location on the headlight. This seal has double sided tape. We have found that many times the seal is not even around the headlight. After headlights are fit, mark and move the seal for a tight fit.

If you should have any questions, suggestions or comments please contact us at 1-800-451-1600.

Form 1024
Date: 12/15/22
Appr.: *GA*
Rev. 2

M2